

# DĀLUME®

Dynamic Architectural Lumination



## GENERAL ILLUMINATION : ONE-DIRECTIONAL

8" x 8" AND 12" x 12" COMPACT FLUORESCENT • 8" x 8" AND 12" x 12" HID



### 1. HOUSING

Constructed from a one piece high grade die cast aluminum with a powder coat finish. Includes an anodized aluminum reflector. Fixture is provided with a universal mounting bracket for direct installation to an electrical junction-box.

### 2. FACEPLATE

Square, one piece die cast aluminum with a powder coat finish, and silicone gasket. Faceplate is secured to the housing by four (4) captive, tamper-resistant, stainless steel screws.

### FINISH

3. Powder coat. Standard colors in black, white or natural aluminum finish. Custom colors available on special order.

### GASKETED MICROPRISMATIC

4. Glass lens protects lamp and provides an even soft illumination.

UPLIGHT



DOWNLIGHT



## GENERAL ILLUMINATION ONE-DIRECTIONAL

**DWM SERIES :**

**WALL MOUNT**


**COLLECTION**

**8x8**

**DIMENSIONS : 8" x 8"**

**DIMENSIONS**

A: DEPTH	8.0"	(203.2mm)
B: LENGTH	8.0"	(203.2mm)
C: WIDTH	8.0"	(203.2mm)

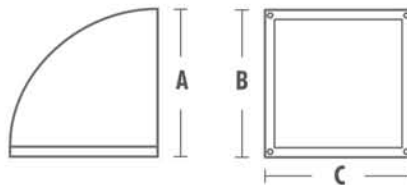

- GENERAL ILLUMINATION
- ONE-DIRECTIONAL

**COMPACT FLUORESCENT**

CATALOG #	LAMPING	BALLAST & VOLTAGE	OPTIONS
DWM1208	-118 : (1)18W 4 PIN/G24q-2 -126 : (1)26W 4 PIN/G24q-3 -132 : (1)32W 4 PIN/GX24q-3	120 : 120V 277 : 277V	-B : BLACK -W : WHITE -CC : CUSTOM COLOR

**FEATURES :**

**APPLICATIONS**

Typical locations are in commercial, hospitality, and retail spaces that contain walls and/or columns that require directional lighting.

**HOUSING**

Constructed from a one piece high grade die cast aluminum with a powder coat finish. Includes an anodized aluminum reflector. Fixture is provided with a universal mounting bracket for direct installation to an electrical junction-box.

**FACEPLATE**

Square, one piece die cast aluminum with a powder coat finish, and silicone gasketed micro-prismatic glass lens. Faceplate is secured to the housing by four (4) captive, tamper resistant, stainless steel screws.

**FINISH**

Powder coat. Standard colors in black, white or natural aluminum finish. Custom colors available on special order, supply two (2) samples.

**LISTING**

UL / ETL Listed, suitable for wet locations.

**NOTE**

Dimming capability for compact fluorescent lamps requires alternate ballast. Please contact your local representative or factory for options.

**METAL HALIDE**


CATALOG #	LAMPING	BALLAST & VOLTAGE	OPTIONS
DWM1208	-50ED17 : (1)50W MH ED17/MED	120 : 120V 277 : 277V	-B : BLACK -W : WHITE -CC : CUSTOM COLOR

**12x12**

**DIMENSIONS : 12" x 12"**

**DIMENSIONS**

A: DEPTH	12.0"	(304.8mm)
B: LENGTH	12.0"	(304.8mm)
C: WIDTH	12.0"	(304.8mm)

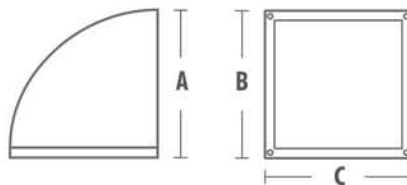

**COMPACT FLUORESCENT**

CATALOG #	LAMPING	BALLAST & VOLTAGE	OPTIONS
DWM1212	-118 : (1)18W 4 PIN/G24q-2 -126 : (1)26W 4 PIN/G24q-3 -132 : (1)32W 4 PIN/GX24q-3 -142 : (1)42W 4 PIN/GX24q-4 -218 : (2)18W 4 PIN/G24q-2 -226 : (2)26W 4 PIN/G24q-3 -232 : (2)32W 4 PIN/GX24q-3	120 : 120V 277 : 277V	-B : BLACK -W : WHITE -CC : CUSTOM COLOR

**METAL HALIDE**

CATALOG #	LAMPING	BALLAST & VOLTAGE	OPTIONS
DWM1212	-100BD17 : (1)100W MH BD17/MED -70BD17 : (1)70W MH BD17/MED -50ED17 : (1)50W MH ED17/MED -70B17 : (1)70W HPS B17/MED -50B17 : (1)50W HPS B17/MED -35B17 : (1)35W HPS B17/MED	120 : 120V 277 : 277V	-B : BLACK -W : WHITE -CC : CUSTOM COLOR