


PROJECT NAME: _____ DATE: _____
 CATALOG#: _____ TYPE: _____

DALUME

Darline Collection

2' x 2' L.E.D. Center Bevel

DIMENSIONS (CENTER BEVEL)	
A: DEPTH	3.9"
B: LENGTH	23.8"
C: WIDTH	23.8"

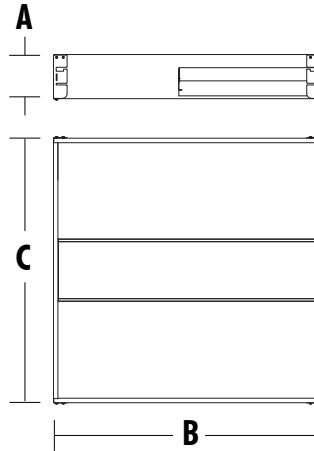

APPLICATION

General lighting for environments where wide, crisp and even light distribution is required. Ideal for applications such as Healthcare, Education, Public Spaces and Commercial.

FEATURES

Center mounted bevel channel houses advance optics diffuse lamp image while providing superior even balanced illumination. Easy maintenance and washable surface.

ELECTRICAL

120V/277 Vac 50/60Hz
 0-10V Dimmable Standard
 24W Emergency Mode Option
 347V Input Option

HOUSING/OPTICS

Premium 20 gauge cold rolled steel housing / frosted acrylic shield.
 High reflectance (91%) matte white polyester powder coat providing high luminaire efficiency with 114 lumens/Watt, 80+ CRI, +/- 100 CCT. Extra Wide 180° beam angle.

MOUNTING

Suitable for standard exposed grid and screw slot T-bar ceilings, sheet rock or drywall ceiling. Optional for Recessed Flange Kit (**FL**) or Retro-Fit mounting into traditional 2x2 fluorescent Lay-In/Louver Troffers specify (**RF**). Reference Retro-Fit Spec Sheet for additional details.

CERTIFICATION


ETL Listed to UL/cUL standards 1598 for dry or damp locations. DLC Approved. 60,000H L70.

WARRANTY

5-year limited warranty to be free from defect in material and workmanship from the date of manufacture.

OUTPUT PERFORMANCE

IES INDOOR REPORT DRL26-40W-UD-40K-IES

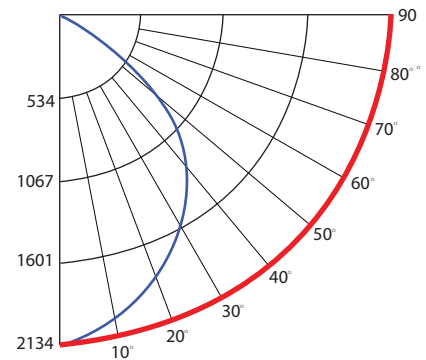

ZONAL LUMEN SUMMARY

Zone	Lumens
0 - 10	200.53
10 - 20	560.68
20 - 30	808.15
30 - 40	892.68
40 - 50	813.06
50 - 60	628.1
60 - 70	410.96
70 - 80	202.65
80 - 90	41.7
90 - 100	.02
100 - 110	.01

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	6097	5718	4885
55	5443	4701	3655
65	4696	3692	2920
75	3711	2699	2413
85	2038	1526	1462

Example: DRL26-40-UD-30K-RF

Ordering	LAMPING	DRIVER AND VOLTAGE	COLOR TEMP	OPTIONS
DRL26	-25 :25W (3085Lm) ^ -27 :27W (2780Lm)* -40 :40W (4560Lm)	UD 120V/277V Dimming -347V 347V Dimming	-30K 3000K* -35K 3500K -40K 4000K* -50K 5000K*	-RF Retro-Fit ^ -EM Emergency Backup -FW 6' Flex Whip -FL Drywall Flange Kit

Note: * Designates extended lead time, ^ Designates 25 Watt Lamping with Retro-fit option only.